

ZenVoice

User manual edition: 1.10

www.zennio.com

CONTENTS

Contents.....	2
Document updates.....	4
1 INTRODUCTION.....	5
2 COMPATIBILITY.....	6
3 FUNCTIONALITY.....	7
3.1 Service access.....	7
3.2 Main menu.....	8
3.2.1 Creating devices.....	9
3.2.2 Editing or Erasing devices.....	10
4 DEVICE TYPES.....	11
4.1 Light.....	11
4.1.1 Operation with Voice Assistants.....	11
4.1.2 Compatible Boxes.....	11
4.1.3 Voice Control.....	11
4.2 Switch.....	12
4.2.1 Operation with Voice Assistants.....	12
4.2.2 Compatible Boxes.....	12
4.2.3 Voice Control.....	12
4.3 Dimmable light.....	13
4.3.1 Operation with Voice Assistants.....	13
4.3.2 Compatible Boxes.....	13
4.3.3 Voice Control.....	13
4.4 Scene.....	14
4.4.1 Operation with Voice Assistants.....	14
4.4.2 Compatible Boxes.....	14
4.4.3 Voice Control.....	14
4.5 Temperature Indicator.....	15
4.5.1 Operation with Voice Assistants.....	15

4.5.2	Compatible Boxes	15
4.5.3	Voice Control	15
4.6	Thermostat	16
4.6.1	Operation with Voice Assistants	16
4.6.2	Compatible Boxes	16
4.6.3	Voice Control	16
4.7	Blinds	17
4.7.1	Operation with Voice Assistants	17
4.7.2	Compatible Boxes	17
4.7.3	Voice Control	18
4.8	RGB Light	19
4.8.1	Operation with Voice Assistants	19
4.8.2	Compatible boxes	19
4.8.3	Voice Control	19
5	ASSISTANTS	21
5.1	Alexa	21
5.1.1	Prerequisites	21
5.1.2	Instructions	21
5.1.3	Languages	22
5.2	Google Home	22
5.2.1	Prerequisites	22
5.2.2	Instructions	23
5.2.3	Languages	24

DOCUMENT UPDATES

Version	Changes
1.6	First version
1.7	Blinds
1.8	RGB Lights
1.9	Google Home Compatibility
1.10	Google Home compatibility of controls Dimmable light, Scene, Temperature indicator, Thermostat, Blinds and RGB light.

1 INTRODUCTION

The new generation of Zennio touchscreens incorporates a voice control function that allows interacting with them from compatible voice assistants.

ZenVoice is the solution to provide a management interface to enable Z70 (or similar) controls to be used by voice assistants through a Skill in Amazon Alexa or a Google Action in Google Home.

This document is provided as a reference guide for the use and configuration of voice-enabled devices based on Z70 or similar controls.

2 COMPATIBILITY

To use ZenVoice, a Zennio device with voice control compatible version must be available. They are listed below:

- Z70v2 3.4 for Alexa compatibility.
- Z70v2 3.5 for Google Home compatibility.

In addition, it will be necessary to have the **voice control license** on this device.

3 FUNCTIONALITY

This section provides detailed instructions on how to access the platform, and a description of its main view.

3.1 SERVICE ACCESS

Any user with a Zennio account can access the platform by inserting their username and password in the ZenVoice website (zenvoice.zennioapps.com):

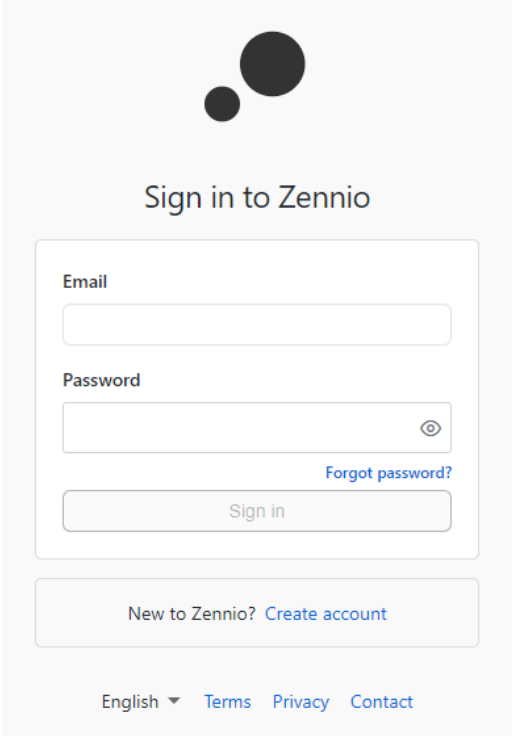
The image shows a screenshot of the Zennio sign-in page. At the top, there is a logo consisting of two black circles of different sizes. Below the logo, the text "Sign in to Zennio" is centered. The main content area is a white box with a light gray border. It contains an "Email" input field, a "Password" input field with a toggle icon (an eye) to its right, and a "Forgot password?" link in blue text below the password field. A "Sign in" button is positioned below the password field. At the bottom of the white box, there is a link "New to Zennio? Create account" in blue text. Below the white box, there is a footer with "English" and a dropdown arrow, followed by links for "Terms", "Privacy", and "Contact".

Figure 1. Zennio Single Sign-On

If you do not have a previous account, you can also create a new account from this page through the link *Create account*, or from the Zennio Remote application¹, available for [Android](#) and [iOS](#).

¹ Please, refer to the [user manual](#) for further information.

3.2 MAIN MENU

The main menu of the application has the structure shown in the Figure 2:

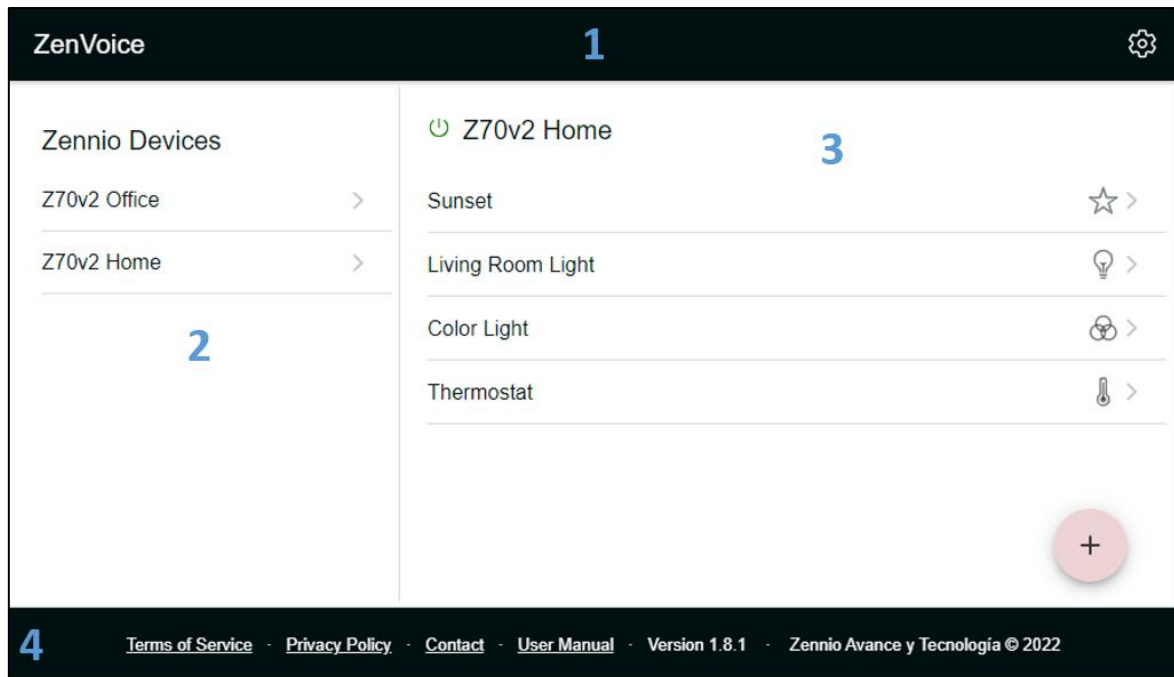


Figure 2. Main menu structure


- **Cabecera (1):** This shows the name of the application and the "Options" menu button, which allows you to:
 - Change the application language (English or Spanish).
 - Change the style (dark or light mode).
 - Log out.
- **ZRCD List (2):** A ZRCD (*Zennio Remote Control Device*) is a Zennio device that allows remote control, such as, for example, Z70v2. This list shows the ZRCDs that the user has paired in his Zennio account. When clicking on each one of them, the devices configured for that ZRCD are shown. To pair new ZRCDs with a user account, you must use the Zennio Remote application².
- **Device List (3):** Devices configured in the ZRCD (lights, blinds, climate, indicators, etc.). For further information, refer [Device Types](#) section.
- **Footer (4):** This shows the links to legal texts, contact, and user manual. Also, it shows the version of the application.

² Please, refer to the [user manual](#) for further information.

3.2.1 CREATING DEVICES

To create a new device, click on the  icon and provide the following information:

- Device type. (See [section 3](#))
- Control configured in the ZRCD.
- Device name in voice assistants.

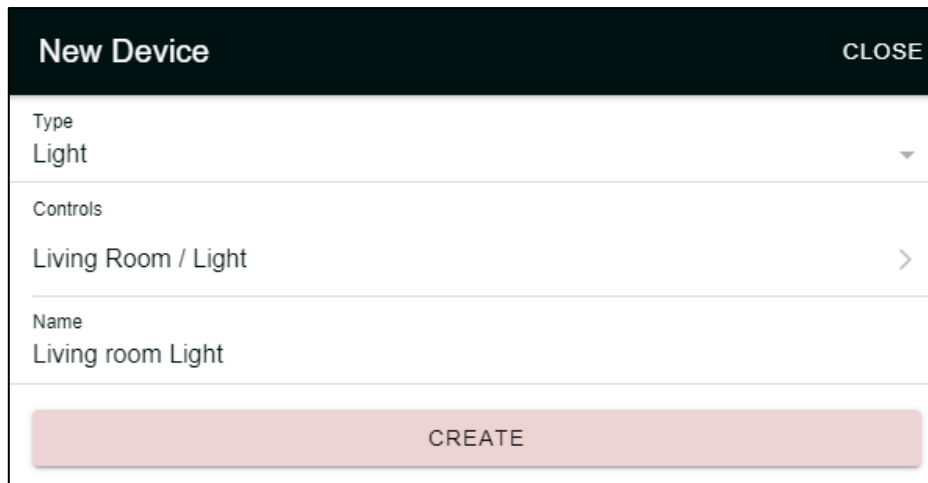

New Device		CLOSE
Type	Light	▼
Controls	Living Room / Light	>
Name	Living room Light	
CREATE		

Figure 3. Device Creation

Once the device has been created, it is shown in the list of devices together with the icon of the type of device to which it belongs.

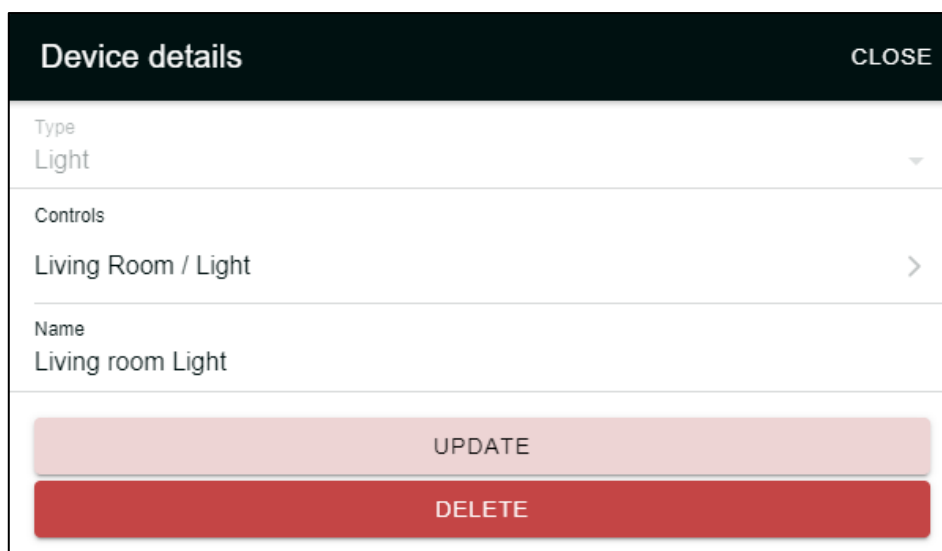


Figure 4. List of devices

3.2.2 EDITING OR ERASING DEVICES

To edit the configuration of a device, click on the device, which will open a pop-up box as shown in Figure 5. This pop-up box allows you to modify the following information:

- Control configured in the ZRCD.
- Device name in voice assistants.



Device details		CLOSE
Type	Light	▼
Controls	Living Room / Light	>
Name	Living room Light	
UPDATE		
DELETE		

Figure 5. Device edition

In addition, from this same pop-up box, the device itself can be deleted. Deleting a device in ZenVoice does not necessarily mean that it will be deleted in the voice assistants in which it is configured.

Note: *Modifying the configuration of the Z70 or similar, or changing the version of its application program, may result in errors in the operation of the voice control, so it is recommended that in these cases all devices associated with the Z70 or similar be deleted and created again.*

4 DEVICE TYPES

4.1 LIGHT

4.1.1 OPERATION WITH VOICE ASSISTANTS

Displayed in the Lights group or category. Enables the functionality to turn a light on and off.

4.1.2 COMPATIBLE BOXES

The boxes compatible with the light type are the binary type boxes:

- [1-Button] Switch icon (Commute 0/1, 0 and 1)
- [1-Button] Hold & Release (0/1 y 1/0)
- [1-Button] Two objects
- [2-Button] Switch icon (0/1 and 1/0)
- [2-Button] Switch + Indicator (0/1 and 1/0)
- [Climate] Mode → Heat/Cool

4.1.3 VOICE CONTROL

4.1.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, turn on the Living Room light.*
- *Alexa, turn off the Living Room light*

4.1.3.2 GOOGLE HOME

It can be controlled by expressions like:

- *Ok Google, turn on the Living Room light.*
- *Ok Google, turn off the Living Room light*

4.2 SWITCH

4.2.1 OPERATION WITH VOICE ASSISTANTS

Shown in the Switches group or category. Enables the functionality to turn a device on and off.

4.2.2 COMPATIBLE BOXES

The boxes compatible with the switch type are the binary type boxes:

- [1-Button] Switch icon (Commute 0/1, 0 and 1)
- [1-Button] Hold & Release (0/1 y 1/0)
- [1-Button] Two objects
- [2-Button] Switch icon (0/1 and 1/0)
- [2-Button] Switch + Indicator (0/1 and 1/0)
- [Climate] Mode → Heat/Cool

4.2.3 VOICE CONTROL

4.2.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, turn on the fan*
- *Alexa, turn off the fan*

4.2.3.2 GOOGLE

It can be controlled by expressions like:

- *Ok Google, turn on the fan.*
- *Ok Google, turn off the fan*

4.3 DIMMABLE LIGHT

4.3.1 OPERATION WITH VOICE ASSISTANTS

Shown in the Lights group or category. Allows the functionality to turn a light on and off, and adjust its intensity.

4.3.2 COMPATIBLE BOXES

The boxes compatible with the dimmable light type are:

- [2-Button] Dimmer

It should be noted that the on/off function and the dimming function are listed separately, but for correct operation in most cases the same box must be selected.

To be able to dim the brightness, the *Precise Dimming* object (used for timers and macros) must be active and linked to the KNX device.

4.3.3 VOICE CONTROL

4.3.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, turn on the Bedroom Light*
- *Alexa, set the Bedroom Light to 50%*
- *Alexa, dim the Bedroom light.*

4.3.3.2 GOOGLE

It can be controlled by expressions like:

- *Ok Google, turn on the Bedroom Light*
- *Ok Google, set the Bedroom Light to 50%*
- *Ok Google, dim the Bedroom light.*

4.4 SCENE

4.4.1 OPERATION WITH VOICE ASSISTANTS

It is shown in the Environments group of Alexa. It allows the functionality of activating a scene to change the states of different devices according to the configuration of the home automation installation.

4.4.2 COMPATIBLE BOXES

The boxes compatible with the Scene type are:

- [1-Button] Scene

4.4.3 VOICE CONTROL

4.4.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, turn on Evening*

4.4.3.2 GOOGLE

It can be controlled by expressions like:

- *Ok Google, turn on Evening*

4.5 TEMPERATURE INDICATOR

4.5.1 OPERATION WITH VOICE ASSISTANTS

Displayed in the Thermostats group or category. Enables the current temperature monitoring functionalities.

4.5.2 COMPATIBLE BOXES

The boxes compatible with the type Temperature Indicator are:

- [Indicator] Temperature
- [2-Button] Switch + Indicator → Indicator Type: Temperature

4.5.3 VOICE CONTROL

4.5.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, what is the temperature in the Living Room*

4.5.3.2 GOOGLE

It can be controlled by expressions like:

- *Ok Google, what is the temperature in the Living Room*

4.6 THERMOSTAT

4.6.1 OPERATION WITH VOICE ASSISTANTS

Shown in the Thermostats group or category. Enables setpoint temperature control and current temperature monitoring functionalities.

4.6.2 COMPATIBLE BOXES

The boxes compatible with the type Thermostat are:

- [Climate Control] Temperature Setpoint

The boxes compatible with the monitoring function of the Thermostat type are:

- [Indicator] Temperature
- [2-Button] Switch + Indicator → Indicator type: Temperature

It should be noted that the actual temperature monitoring function and the setpoint temperature control function are listed separately, so the appropriate box should be selected for each case, as not all configurations for the Setpoint temperature box include an object to display the actual temperature.

4.6.3 VOICE CONTROL

4.6.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, what is the temperature in the Living Room*
- *Alexa, set thermostat to 23 degrees*
- *Alexa, lower Living Room temperature by 2 degrees.*

Note: Although Alexa allows a wide temperature range to be set, if an attempt is made to set a temperature below or above the parameterized range, it will automatically set the minimum or maximum respectively.

4.6.3.2 GOOGLE

It can be controlled by expressions like:

- OK Google, what is the temperature in the Living Room
- OK Google, set thermostat to 23 degrees
- OK Google, lower Living Room temperature by 2 degrees.
- OK Google, I'm cold

Note: In Google Home thermostats always appear in heating mode.

4.7 BLINDS

4.7.1 OPERATION WITH VOICE ASSISTANTS

It allows the functionalities of raising and lowering a blind.

4.7.2 COMPATIBLE BOXES

The boxes compatible with the blind type are:

- [2 Buttons] Shutter

To be able open or close the blinds, the *Shutter Positioning* object (used for timers and macros) must be active and linked to the KNX device.

4.7.3 VOICE CONTROL

4.7.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, raise the blind*
- *Alexa, lower the blind a bit*
- *Alexa, open the blind*
- *Alexa, set blind to 60%*

Note: *Alexa does not have commands to stop the movement of a blind.*

4.7.3.2 GOOGLE

It can be controlled by expressions like:

- *OK Google, raise the blind*
- *OK Google, lower the blind a bit*
- *OK Google, open the blind*
- *OK Google, set blind to 60%*

Note: *Google does not have commands to stop the movement of a blind.*

4.8 RGB LIGHT

4.8.1 OPERATION WITH VOICE ASSISTANTS

Shown in the Lights group or category. Allows the functionality to switch a light on and off, and to change its colour.

4.8.2 COMPATIBLE BOXES

The boxes compatible with the blind type are:

- [Other] RGB Control
- [Other] RGBW Control

4.8.3 VOICE CONTROL

4.8.3.1 ALEXA

It can be controlled by expressions like:

- *Alexa, turn on RGB light* ← It will light up white
- *Alexa, set RGB light to blue*
- *Alexa, set RGB light to dark grey*

4.8.3.2 GOOGLE

It can be controlled by expressions like:

- *OK Google, turn on RGB light* ← It will light up white
- *OK Google, set RGB light to blue*
- *OK Google, set RGB light to dark grey*

Note: For different shades of white, the color rendering done in the Google Home app and that done on the Z70 may differ slightly.

5 ASSISTANTS

An assistant is a third-party device, which has its own application, and through which it is possible to control and monitor home automation devices of a user, linking the assistant's user account with Zennio's user account.

5.1 ALEXA

5.1.1 PREREQUISITES

- To have a KNX installation with a Zennio touch screen model Z70 (v2 3.4 or higher) or similar.
- To have installed the Zennio Remote mobile app.
- To be registered in Zennio Remote with username and password.
- To have paired your Z70 or similar with voice control license with the Zennio Remote app.
- To have set the desired control of your Z70 or similar as a controllable device for voice control. This can be done from the [ZenVoice](#) website.

5.1.2 INSTRUCTIONS

- Search for the ZenVoice skill in the Amazon Alexa application and add it. To do this, click on the "Allow to use" button (Figure 6).

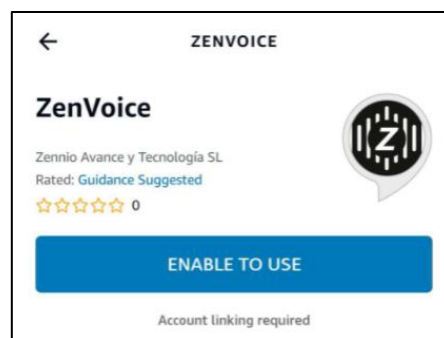


Figure 6. ZenVoice Skill in Alexa

- The window shown in Figure 1 will open, where you will have to enter the credentials of your Zennio account.
- Once logged in, the configured devices can be detected via ZenVoice.

Note: After activation of the Skill, the authentication will be valid for a period of 10 years. After that time, it will be necessary to deactivate and reactivate the Skill to log in again.

5.1.3 LANGUAGES

The ZenVoice skill is available in the following languages:

- English (GB, IN)
- Spanish (ES)
- French (FR)
- German (DE)
- Italian (IT)
- Hindi (IN)

5.2 GOOGLE HOME

5.2.1 PREREQUISITES

- To have a KNX installation with a Zennio touch screen model Z70 (v2 3.5 or higher) or similar.
- To have installed the Zennio Remote mobile app.
- To be registered in Zennio Remote with username and password.
- To have paired your Z70 or similar with voice control license with the Zennio Remote app.
- To have set the desired control of your Z70 or similar as a controllable device for voice control. This can be done from the [ZenVoice](http://support.zennio.com) website.

5.2.2 INSTRUCTIONS

- Search ZenVoice Action in Google Home and add it. To do this, click on the *Add and manage* button, then on *Set up device*, and finally on *Works with Google*. In the list of services you must select ZenVoice and enter the credentials of your Zennio account in the login that opens.

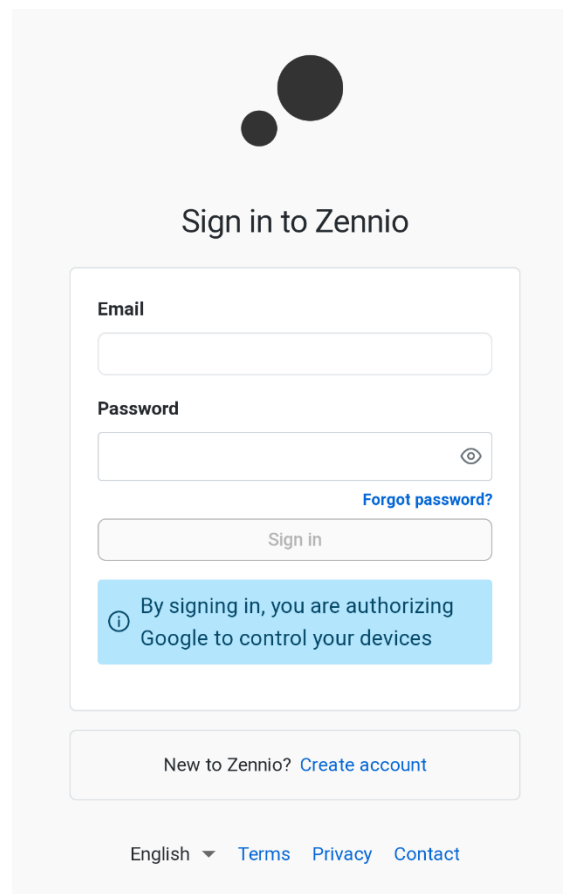


Figure 7. Login

- When access has been granted, the configured devices can be detected through ZenVoice.

Note: You need to have at least one voice-controllable device created in order to add ZenVoice Action to Google Home.

Note: After activation of the Google Action, the authentication will be valid for a period of 10 years. After that time, it will be necessary to deactivate and reactivate the Google Action to log in again.

5.2.3 LANGUAGES

ZenVoice Action is available in the following languages:

- Spanish (ES)

Join and send us your inquiries
about Zennio devices:
<http://support.zennio.com>

Zennio Avance y Tecnología S.L.
C/ Río Jarama, 132. Nave P-8.11
45007 Toledo (Spain).

Tel. +34 925 232 002.

www.zennio.com
info@zennio.com



RoHS