


Product data sheet

Universal push-button module 2-gang

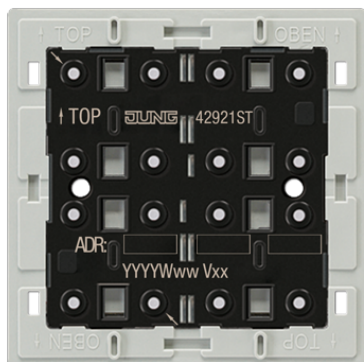

Reference number

42921 ST

KNX universal push-button module 2-gang

available July 2023

for cover kit 2-gang, ref.-no.: .. 402 TSA ..

for cover 2-gang with symbols, ref.-no.: .. 402 TSAP ..

can be extended by means of a push-button extension module, ref.-no.: 409.. TSEM

Adapter frames are included in delivery:

ref.-no. LS 4 AR for LS range (pre-mounted) and ref.-no. CD 4 AR for CD range.

AS / A ranges without adapter frame.

Only with ETS 5.7.7 or later versions or ETS6.0.6 or later versions the full functionality will be available.

ETS product family: Push-button

Product type: 2-gang push-button

1 blue LED: operation indication

4 red LED: status indication

Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- KNX medium: TP 256
- Push-button functions switching, dimming, controlling blinds, value transmitter, calling up light scenes etc.
- Measurement of room temperature
- Temperature measurement optionally with internal device sensor and external sensor connected via communication object
- To be completed with cover kit
- Two red status LEDs per button
- One blue operation LED as orientation light and to indicate the programming status
- LED functions alarm message and reducing brightness can be adjusted separately
- Integrated bus coupling unit
- One, two or three functions per button
- Push-button function or rocker function, vertical or horizontal
- Disabling function: Disabling or change function mode of single or all button functions
- Connection for a push-button extension module, 1-4 gang
- Including transparent cover kit for operation on construction site without design covers
- KNX Data Secure compatible with ETS 5.7.7 or higher